


- Dual ball bearing, oil & water-cooled CHRA
- Free float, non-wastegated turbine housing
- Ported shroud compressor housing to increase surge resistance

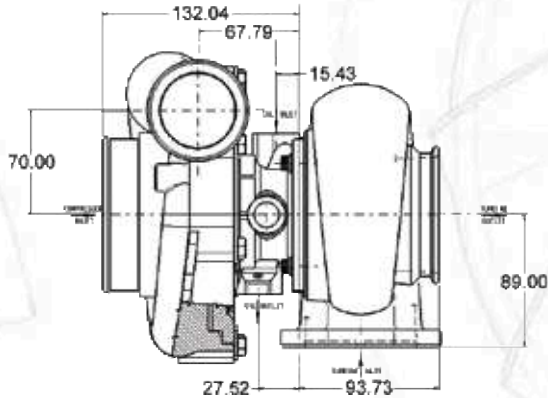


DISPLACEMENT 2.0L - 6.0L

HORSEPOWER 400 - 675

2000
1900
1800
1700
1600
1500
1400
1300
1200
1100
1000
900
800
700
600
500
400
300
200
100
0

Component	INLET		OUTLET	
	Page	Diagram	Page	Diagram
Compressor	82	31	82	25
Turbine	84	03	86	04
Oil	84	13	84	08
Water	86	14	86	14

GT4088R		COMPRESSOR				TURBINE		
Turbo PN	CHRA PN	Ind Whl Dia	Exd Whl Dia	Trim	A/R	Whl Dia	Trim	A/R
751470-1	751450-9	63.5mm	88.0mm	52	0.72	77.0mm	78	0.85
751470-2	751450-9	63.5mm	88.0mm	52	0.72	77.0mm	78	0.95
751470-3	751450-9	63.5mm	88.0mm	52	0.72	77.0mm	78	1.06
751470-4	751450-9	63.5mm	88.0mm	52	0.72	77.0mm	78	1.19

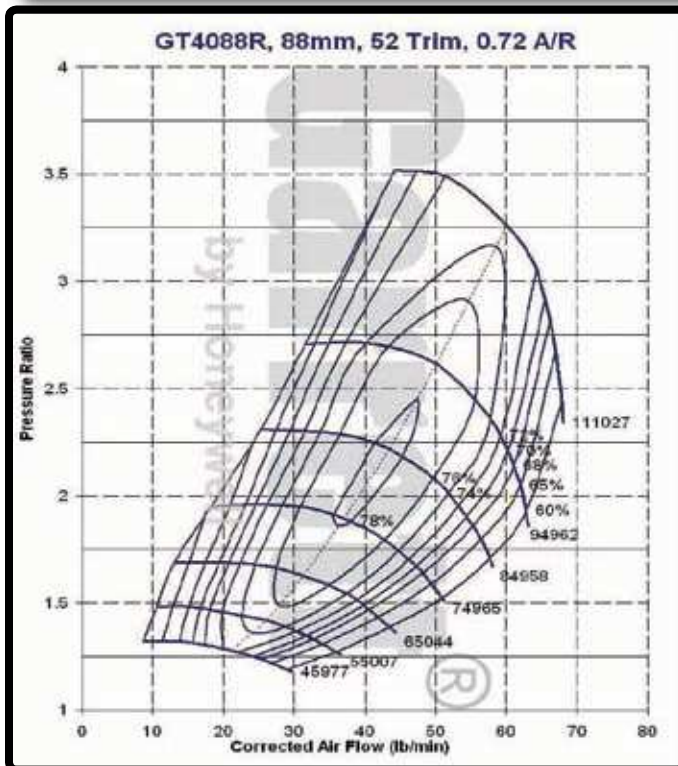

TURBINE HOUSING OPTIONS	
PN	A/R
448375-18	0.85
448375-19	0.95
448375-20	1.06
448375-21	1.19

