



- Dual ball bearing, oil & water-cooled CHRA
- Free float, non-wastegated turbine housing
- Ideal for applications that cannot accommodate the GT4294R but need more flow than the GT4088R
- Outline interchangeable with the GT4088R
- Ported shroud compressor housing to increase surge resistance

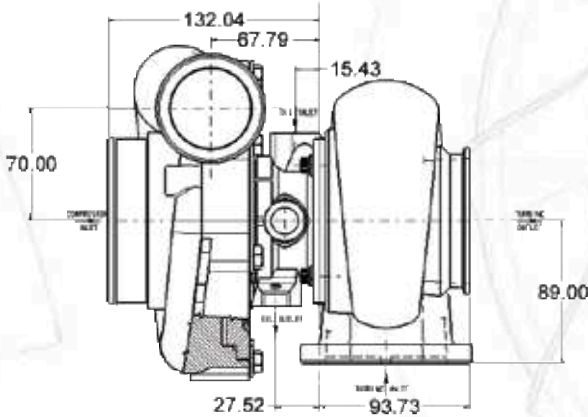

DISPLACEMENT 2.0L - 6.0L	HORSEPOWER 450 - 800	2000
		1900
		1800
		1700
		1600
		1500
		1400
		1300
		1200
		1100
		1000
		900
		800
		700
		600
		500
400		
300		
200		
100		
0		

Component	INLET		OUTLET	
	Page	Diagram	Page	Diagram
Compressor	82	31	82	25
Turbine	84	03	86	04
Oil	84	13	84	08
Water	86	14	86	14

GT4094R		COMPRESSOR				TURBINE		
Turbo PN	CHRA PN	Ind Whl Dia	Exd Whl Dia	Trim	A/R	Whl Dia	Trim	A/R
751470-19	751450-16	67.8mm	94.0mm	52	0.72	77.0mm	78	0.85
751470-20	751450-16	67.8mm	94.0mm	52	0.72	77.0mm	78	0.95
751470-21	751450-16	67.8mm	94.0mm	52	0.72	77.0mm	78	1.06
751470-22	751450-16	67.8mm	94.0mm	52	0.72	77.0mm	78	1.19

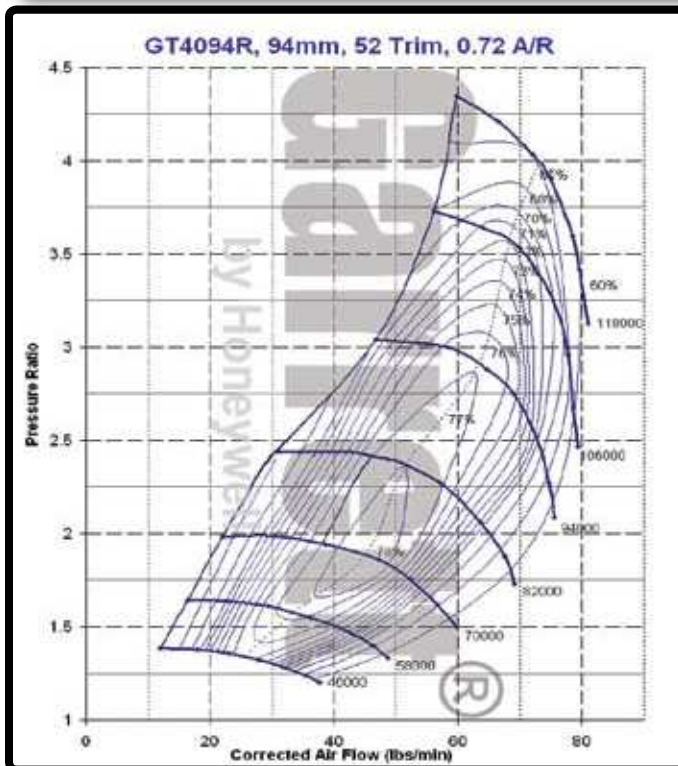

TURBINE HOUSING OPTIONS	
PN	A/R
448375-18	0.85
448375-19	0.95
448375-20	1.06
448375-21	1.19

