


- Journal bearing, oil-cooled CHRA
- Free float, non-wastegated turbine housing
- Optional turbine housings with T4 or diesel turbine inlet flange
- Ported shroud compressor housing to increase surge resistance

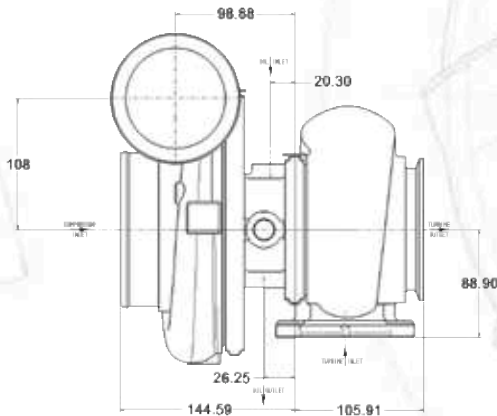

Component	INLET		OUTLET	
	Page	Diagram	Page	Diagram
Compressor	82	37	82	07
Turbine	84	03	86	06
Oil	84	17	84	08
Water	-	-	-	-

DISPLACEMENT 2.0L - 7.0L	HORSEPOWER 450 - 1000	2000
		1900
		1800
		1700
		1600
		1500
		1400
		1300
		1200
		1100
		1000
	900	
	800	
	700	
	600	
	500	
	400	
	300	
	200	
	100	
	0	

GT4202		COMPRESSOR				TURBINE		
Turbo PN	CHRA PN	Ind Whl Dia	Exd Whl Dia	Trim	A/R	Whl Dia	Trim	A/R
731376-2	712402-8	74.3mm	102.3mm	53	0.60	82.0mm	84	1.15

TURBINE HOUSING OPTIONS

PN	A/R
757707-1*	1.01
757707-3*	1.28
757707-4*	1.44
757707-10+	1.01
757707-9+	1.15

* Note: inlet flange: Page - 84 Diagram - 03
 +Note: inlet flange: Page - 84 Diagram - 05

