


2000	DISPLACEMENT 2.0L - 7.0L
1900	
1800	
1700	
1600	
1500	
1400	
1300	
1200	
1100	
1000	
900	
800	
700	
600	
500	
400	
300	
200	
100	
0	

HORSEPOWER 425 - 850




- Journal bearing, oil-cooled CHRA
- Free float, non-wastegated turbine housing
- Optional turbine housings with T4 or diesel turbine inlet flange
- Ported shroud compressor housing to increase surge resistance

FLANGE	INLET		OUTLET	
	Component	Page	Diagram	Page
Compressor	82	37	82	07
Turbine	84	05	86	05
Oil	84	22	84	08
Water	-	-	-	-

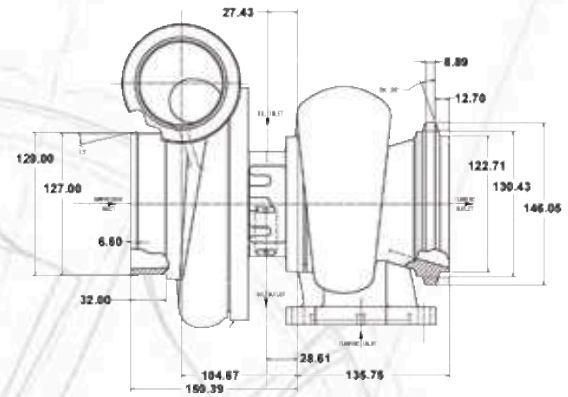

GT4294		COMPRESSOR				TURBINE		
Turbo PN	CHRA PN	Ind Whl Dia	Exd Whl Dia	Trim	A/R	Whl Dia	Trim	A/R
731376-1	712402-7	70.3mm	94.0mm	56	0.60	82.0mm	84	1.15

TURBINE HOUSING OPTIONS	
PN	A/R
757707-1*	1.01
757707-2*	1.15
757707-3*	1.28
757707-4*	1.44
757707-10+	1.01
757707-9+	1.15

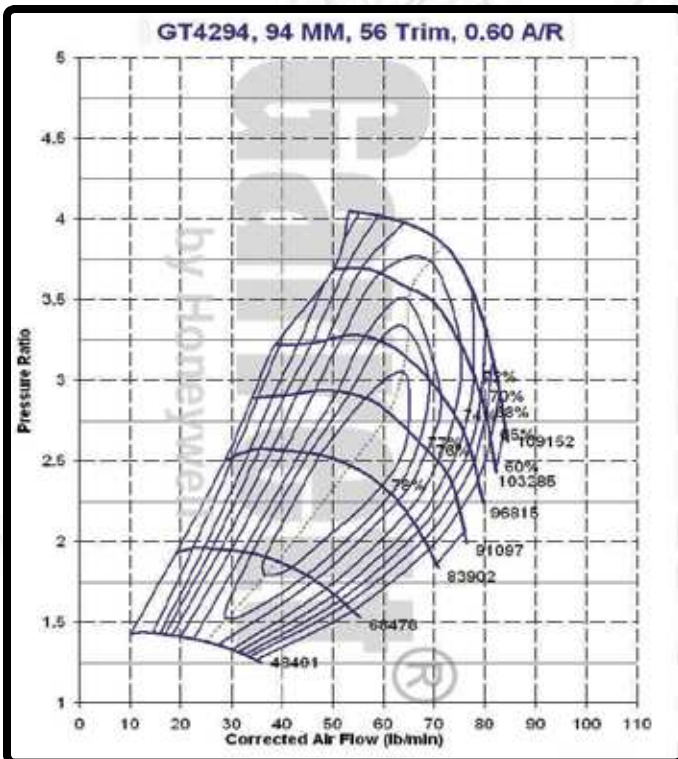

*Note: inlet flange: Page - 84 Diagram - 03
 +Note: inlet flange: Page - 84 Diagram - 05

